




KHD1002 (299x600mm)




KHD1002-4A (299x600mm)  
單花 (百合花 4 片組)

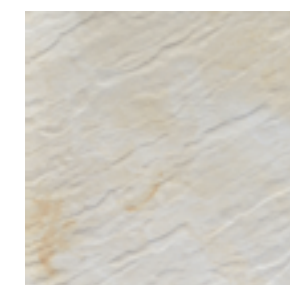

H3D102 特 (299x299mm)



WALL TILES

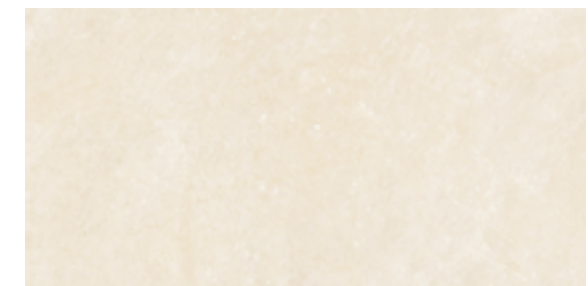


KHD1003 (299x600mm)



KHD1003SL9 (60x600mm)

FLOOR TILES

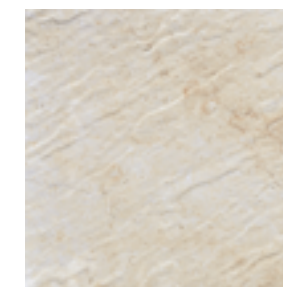

H3D806 特 (299x299mm)






WALL TILES



KHD1008 (299x600mm)



KHD1008SL8 (90x600mm)

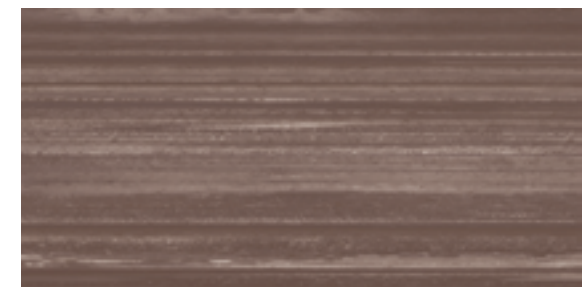

KHD1009 (299x600mm)



WALL TILES



KHD1011 (299x600mm)




KHD1091 特特 (299x600mm)



KHD1091A (299x600mm)



FLOOR TILES

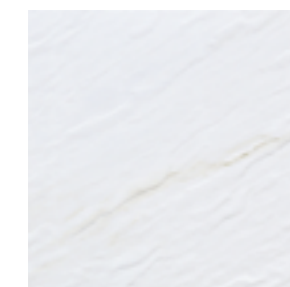

H3D501 特 (299x299mm)





WALL TILES



KHD1021 (299x600mm)



KHD1008SL8 (95x600mm)



KHD1022 (299x600mm)



KLK90102SL6 (80x600mm)





#### WALL TILES



KLK90101 (299x600mm)




KLK90101A (299x600mm)



KLK90101SL (80x600mm)



#### FLOOR TILES

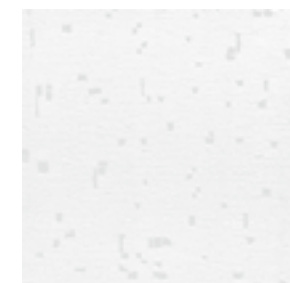

F9N801 (299x299mm)




F9N662 (299x299mm)





WALL TILES

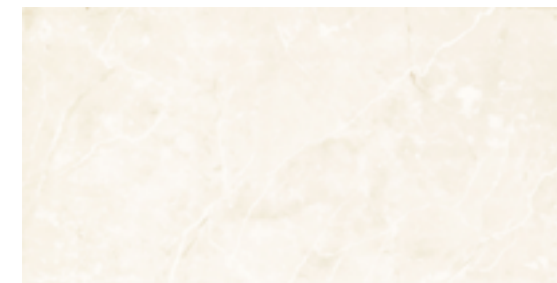

KLK90102 (299x600mm)




KLK90102A (299x600mm)




KLK90102SL7 (80x600mm)



FLOOR TILES

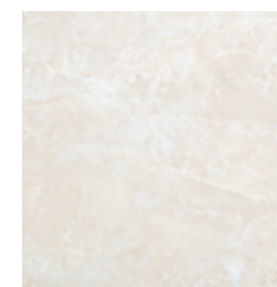

F9N815 (299x299mm)

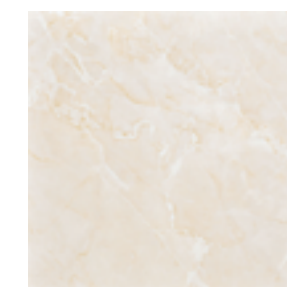

F9N108 (299x299mm)






 WALL TILES



KLK90109 (299x600mm)




KLK90102SL6 (80x600mm)



KLK90109SL (80x600mm)


 FLOOR TILES

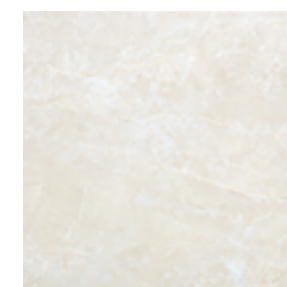

F9N815 (299x299mm)




F9N865 (299x299mm)





#### WALL TILES

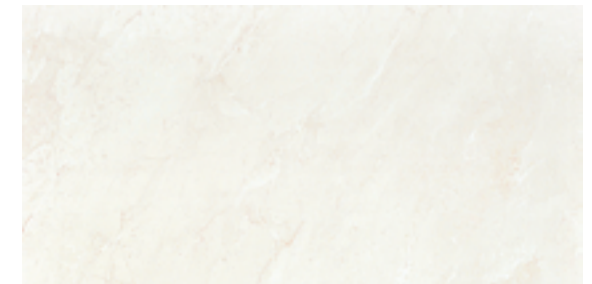

KLK90151 (299x600mm)



KLK90151A (299x600mm)



KLK90151SL (70x600mm)



#### FLOOR TILES




F9N582 (299x299mm)



WALL TILES


30x60cm

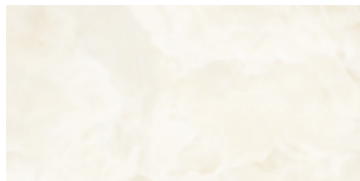

KHD1002 (299x600mm)



KHD1011 (299x600mm)

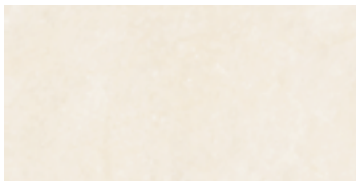

KHD1003 (299x600mm)



A1



KHD1091 特特 (299x600mm)



A2



KHD1091A (299x600mm)




A3



A4

KHD1002-4A (299x600mm)  
單花(百合花 4 片組)

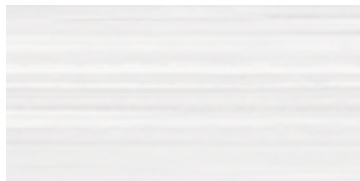

KHD1008 (299x600mm)



KHD1008SL8 (90x600mm)



KHD1009 (299x600mm)



KHD1021 (299x600mm)



KHD1022 (299x600mm)


全新高解析 3D 數位噴墨工藝

WALL TILES

30x60cm



KLK90101 (299x600mm)

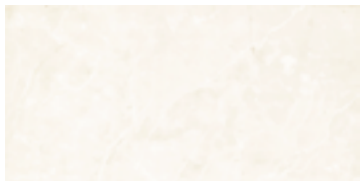

KLK90102 (299x600mm)



KLK90109 (299x600mm)



KLK90101A (299x600mm)



KLK90102A (299x600mm)



KLK90102SL6 (80x600mm)




KLK90101SL (80x600mm)



KLK90102SL7 (80x600mm)



KLK90109SL (80x600mm)

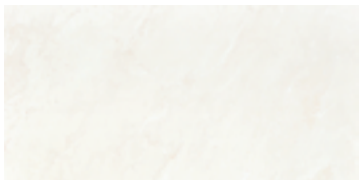

KLK90151 (299x600mm)



KLK90151A (299x600mm)



KLK90151SL (70x600mm)





鯨來旺

KEIKO

## 磁磚資訊

## 陶瓷面磚 II 類 - 內裝地壁磚 (石質地壁磚) Floor Tile

| 項目 Items                            | 標準 Standard | 國家標準<br>CNS Standard | 弘松窯業標準<br>Grand Ceramic Standard |
|-------------------------------------|-------------|----------------------|----------------------------------|
| 長度誤差 Length Allowance               |             | ± 1.4 mm             | ± 1.1 mm                         |
| 寬度誤差 Width Allowance                |             | ± 1.4 mm             | ± 1.1 mm                         |
| 厚度誤差 Thickness Allowance            |             | ± 0.5 mm             | ± 0.4 mm                         |
| 翹曲測定 Flatness Allowance             |             | ± 1.0 mm             | ± 0.8 mm                         |
| 吸水率 Water Absorption                |             | 10.0 % 以下            | 8 % 以下                           |
| 抗折強度 Bending Strength               |             | 540N 以上              | 1500 N 以上                        |
| 釉面磨耗 Resistance of Surface Abrasion |             | 0-5 級                | 4 級                              |
| 蒸壓試驗 Thermal Shock Resistance       |             | 不得產生釉裂               | 符合                               |

## 陶瓷面磚 III 類 - 內裝壁磚 (陶質壁磚) Wall Tile

| 項目 Items                      | 標準 Standard | 國家標準<br>CNS Standard | 弘松窯業標準<br>Grand Ceramic Standard |
|-------------------------------|-------------|----------------------|----------------------------------|
| 長度誤差 Length Allowance         |             | ± 2.0 mm             | ± 1.6 mm                         |
| 寬度誤差 Width Allowance          |             | ± 2.0 mm             | ± 1.1 mm                         |
| 厚度誤差 Thickness Allowance      |             | ± 0.5 mm             | ± 0.4 mm                         |
| 翹曲測定 Flatness Allowance       |             | ± 1.2 mm             | ± 0.9 mm                         |
| 吸水率 Water Absorption          |             | 50.0 % 以下            | 15 % 以下                          |
| 抗折強度 Bending Strength         |             | 108N 以上              | 1000N 以上                         |
| 蒸壓試驗 Thermal Shock Resistance |             | 不得產生釉裂               | 符合                               |

## 鯨來旺磁磚產品規格表 Product Specification

| SIZE/MM<br>尺寸 | PC/BOX<br>片 / 箱 | M <sup>2</sup> /BOX<br>平方米 / 箱 | KG/BOX<br>公斤 / 箱 | BOX/PLT<br>箱 / 棧 | M <sup>2</sup> /PLT<br>平方米 / 棧 | KG/PLT<br>公斤 / 棧 | PC / M <sup>2</sup><br>片 / 平方米 | PC/PIN<br>片 / 坪 |
|---------------|-----------------|--------------------------------|------------------|------------------|--------------------------------|------------------|--------------------------------|-----------------|
| 299X600       | 8               | 1.44                           | 26               | 42               | 60.48                          | 1092             | 5.57                           | 18              |
| 250X398       | 15              | 1.49                           | 21.9             | 56               | 83.44                          | 1226.4           | 10.05                          | 32.6            |
| 299X299       | 16              | 1.43                           | 23.4             | 54               | 77.22                          | 1263.6           | 11.19                          | 36.2            |
| 250X250       | 25              | 1.56                           | 23.4             | 64               | 99.84                          | 1497.6           | 16                             | 51.8            |

■ 規格，顏色以實品為準。Size, color shall be based on actual products.