



WALL TILES



HW24628
(25x40cm)



HW24626
(25x40cm)



HW24627
(25x40cm)



HW24601
(25x40cm)



HW24628A
(25x40cm)



HW24626A
(25x40cm)



HW24627A
(25x40cm)



HW24601A2
(25x40cm)



HW24628L
(6x25cm)




HW24626L
(6x25cm)



HW24627L
(6x25cm)



HW24601L2
(6x25cm)



G25007
(25x25cm)



H1
(25x25cm)



G25006
(25x25cm)



G25089 特
(25x25cm)



WALL TILES



HS24692 特
(25x40cm)



HS24693 特
(25x40cm)



HW24621
(25x40cm)



HW24622
(25x40cm)



HS24692AD
(25x40cm)



HS24693A
(25x40cm)



HW24621A
(25x40cm)




HW24622A
(25x40cm)



HS24692L
(6x25cm)



HS24693L
(6x25cm)



HW24621L
(6x25cm)



HW24622L
(6x25cm)




G25011
(25x25cm)



G25011
(25x25cm)



G25006
(25x25cm)




G25007
(25x25cm)

磁磚總表

25x40cm
WALL TILES



HW24601 HW24621 HW24622 HS24692 特

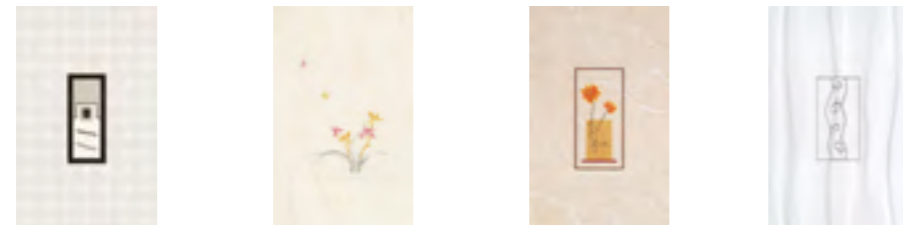

HW24601A2 HW24621A HW24622A HS24692AD



HW24601L2 HW24621L HW24622L HS24692LA



HS24693 特 HW24626 HW24627 HW24628



HS24693A HW24626A HW24627A HW24628A



HS24693L HW24626L HW24627L HW24628L


30x30cm
FLOOR TILES

全新高解析 3D 數位噴墨工藝




H3D102 特 H3D501 特 H3D806 特

30x30cm
FLOOR TILES

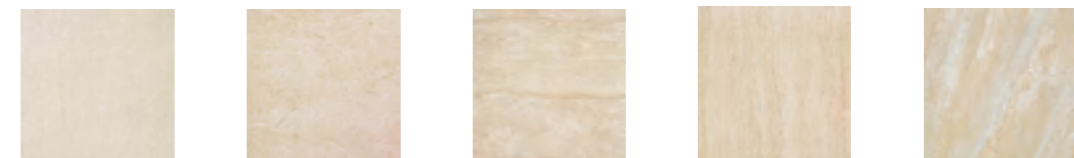

F9N121 F9N122 F9N303 F9N322 F9N512

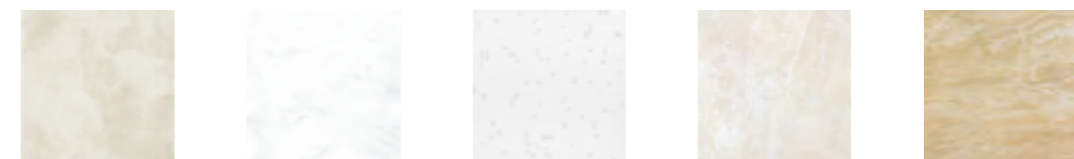

F9N582 F9N662 F9N801 F9N815 F9N865



F9N880

25x25cm
FLOOR TILES



G25001 G25002 G25003 G25006 G25007 G25010



G25011 G25089 特 H1

■ 編號系列名 CHD、H3D 為數位噴墨產品

陶瓷面磚 II 類 - 內裝地壁磚 (石質地壁磚) Floor Tile

項目 Items	標準 Standard	國家標準 CNS Standard	弘松窯業標準 Grand Ceramic Standard
長度誤差 Length Allowance		± 1.4 mm	± 1.1 mm
寬度誤差 Width Allowance		± 1.4 mm	± 1.1 mm
厚度誤差 Thickness Allowance		± 0.5 mm	± 0.4 mm
翹曲測定 Flatness Allowance		± 1.0 mm	± 0.8 mm
吸水率 Water Absorption		10.0 % 以下	8 % 以下
抗折強度 Bending Strength		540N 以上	1500 N 以上
釉面磨耗 Resistance of Surface Abrasion		0-5 級	4 級
蒸壓試驗 Thermal Shock Resistance		不得產生釉裂	符合

陶瓷面磚 III 類 - 內裝壁磚 (陶質壁磚) Wall Tile

項目 Items	標準 Standard	國家標準 CNS Standard	弘松窯業標準 Grand Ceramic Standard
長度誤差 Length Allowance		± 2.0 mm	± 1.6 mm
寬度誤差 Width Allowance		± 2.0 mm	± 1.1 mm
厚度誤差 Thickness Allowance		± 0.5 mm	± 0.4 mm
翹曲測定 Flatness Allowance		± 1.2 mm	± 0.9 mm
吸水率 Water Absorption		50.0 % 以下	15 % 以下
抗折強度 Bending Strength		108N 以上	1000N 以上
蒸壓試驗 Thermal Shock Resistance		不得產生釉裂	符合

虎頭蜂磁磚產品規格表 Product Specification

SIZE/MM 尺寸	PC/BOX 片 / 箱	M ² /BOX 平方米 / 箱	KG/BOX 公斤 / 箱	BOX/PLT 箱 / 棧	M ² /PLT 平方米 / 棧	KG/PLT 公斤 / 棧	PC / M ² 片 / 平方米	PC/PIN 片 / 坪
299X600	8	1.44	26	42	60.48	1092	5.57	18
250X398	15	1.49	21.9	56	83.44	1226.4	10.05	32.6
299X299	16	1.43	23.4	54	77.22	1263.6	11.19	36.2
250X250	25	1.56	23.4	64	99.84	1497.6	16	51.8

■ 規格，顏色以實品為準。Size, color shall be based on actual products.